


SOLAR LANTERN PASEO

Description

Paseo, as its Spanish name suggests, is an invitation to take a stroll. A solar portable light, it offers 2 operating mode : night-light, or manual. The height indicated above relates to the handled in folded position; when raised the height is 41 cm. Solar lantern with structure in teak and an Epoxy black lacquered aluminium grille on each of its 4 sides. Equipped with an autonomous solar module, comprising a high-performance solar panel, 2 lithium batteries and 10 LED's giving a total power of 3 W or a maximum of 500 Lumens, or the equivalent of a 50 W incandescent bulb. Colour temperature 3,000 K (warm white). Batteries are interchangeable, with a life span of between 3 and 5 years. Micro USB port for recharging batteries on mains power if desired. A USB cable, for use with the micro USB port, is supplied. Full charging time is 7 hours via the USB port and 8 hours via the solar panel in optimum conditions. 5 - 200 hours continuous operation depending on the chosen light intensity.

Technical characteristics

Paseo, as its Spanish name suggests, is an invitation to take a stroll. A solar portable light, it offers 2 operating mode : night-light, or manual. The height indicated above relates to the handled in folded position; when raised the height is 41 cm. Solar lantern with structure in teak and an Epoxy black lacquered

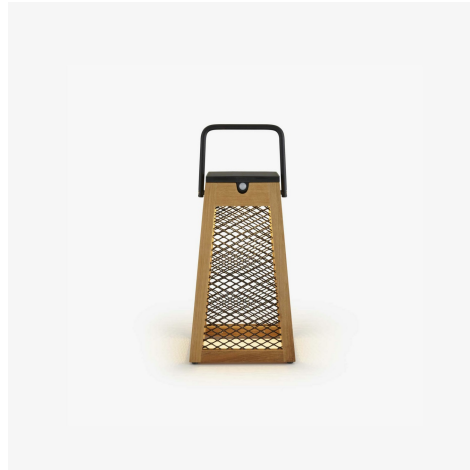

DIMENSIONS

Height 310 mm Width 180 mm Depth 180 mm	Weight 1.5 kg
---	---------------

aluminium grille on each of its 4 sides.
Equipped with an autonomous solar module, comprising a high-performance solar panel, 2 lithium batteries and 10 LED's giving a total power of 3 W or a maximum of 500 Lumens, or the equivalent of a 50 W incandescent bulb. Colour temperature 3,000 K (warm white). Batteries are interchangeable, with a life span of between 3 and 5 years. Micro USB port for recharging batteries on mains power if desired. A USB cable, for use with the micro USB port, is supplied. Full charging time is 7 hours via the USB port and 8 hours via the solar panel in optimum conditions. 5 - 200 hours continuous operation depending on the chosen light intensity.

More information on

www.ligne-roset.com

© Ligne Roset 2024