

# TABLE LAMP ASHA

## Designer


Itamar Burstein

## Description

A first LED module located at the cylindrical end of the lampshade and protected by a PMMA diffuser, illuminates upwards: power 3W colour temperature 3000 K (warm white) 330 lumens. A second LED module located at the conical end of the lampshade and protected by a PMMA diffuser, illuminates downwards: power 7W colour temperature 3000 K (warm white) 770 lumens. Possibility of varying the intensity of each LED module independently thanks to two switch/dimmer buttons located on the side of the lampshade. Brief touch : ON /OFF. Continuous touch : dimmer - variation of the intensity. Black PVC electric cable.

## Technical characteristics

A first LED module located at the cylindrical end of the lampshade and protected by a PMMA diffuser, illuminates upwards: power 3W colour temperature 3000 K (warm white) 330 lumens. A second LED module located at the conical end of the lampshade and protected by a PMMA diffuser, illuminates downwards: power 7W colour temperature 3000 K (warm white) 770 lumens. Possibility of varying the intensity of each LED module independently thanks to two switch/dimmer buttons located on the side of the lampshade. Brief touch : ON

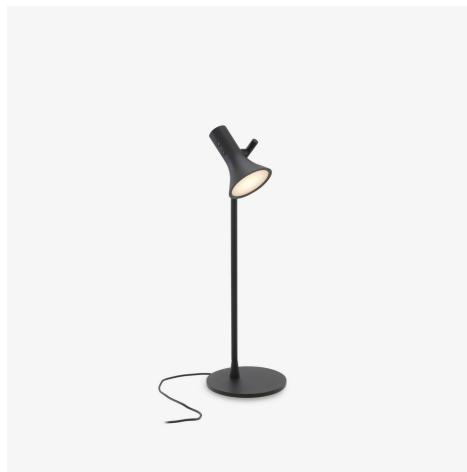

## DIMENSIONS

Height 510 mm | Diameter 160 mm | Weight 2.7 kg

/OFF. Continuous touch : dimmer - variation of the intensity. Black PVC electric cable. A first LED module located at the cylindrical end of the lampshade and protected by a PMMA diffuser, illuminates upwards: power 3W colour temperature 3000 K (warm white) 330 lumens. A second LED module located at the conical end of the lampshade and protected by a PMMA diffuser, illuminates downwards: power 7W colour temperature 3000 K (warm white) 770 lumens. Possibility of varying the intensity of each LED module independently thanks to two switch/dimmer buttons located on the side of the lampshade. Brief touch : ON /OFF. Continuous touch : dimmer - variation of the intensity. Black PVC electric cable. A first LED module located at the cylindrical end of the lampshade and protected by a PMMA diffuser, illuminates upwards: power 3W colour temperature 3000 K (warm white) 330 lumens. A second LED module located at the conical end of the lampshade and protected by a PMMA diffuser, illuminates downwards: power 7W colour temperature 3000 K (warm white) 770 lumens. Possibility of varying the intensity of each LED module independently thanks to two switch/dimmer buttons located on the side of the lampshade. Brief touch : ON /OFF. Continuous touch : dimmer - variation of the intensity. Black PVC electric cable.

## **More information on**

[www.ligne-roset.com](http://www.ligne-roset.com)

© Ligne Roset 2024